


Oil Dock Hose

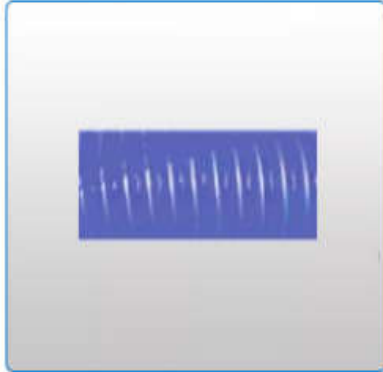

Application

Heavy duty Suction and discharge of petroleum products in road and rail tanker, dockside and ship.

Standard: - EN 13765 TYPE 3 AND AS 2117 TYPE 2 GRADE 1 AND 2.

Temperature Range Continuous: -30°C to +100°C

Color: - Blue with white strip

Construction: Heavy duty PP fabric and films with a double layer of PVC coated fabric cover with inner wire are galvanised MS.

| Part No | Nominal Bore | Hose O.D. (Nom.) | Working Pressure | | Min. Bend Radius |
|-----------|--------------|------------------|------------------|-----|------------------|
| | | | psi | bar | |
| IF811-64 | 100 | 120 | 200 | 14 | 430 |
| IF811-96 | 150 | 175 | 200 | 14 | 550 |
| IF811-128 | 200 | 240 | 200 | 14 | 750 |
| IF811-166 | 250 | 290 | 200 | 14 | 920 |

For more details or product related enquires feel free mail us: info@italflexitaly.it