


# Oil Hoses

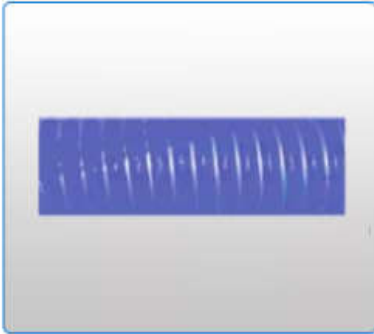

## Application

Suitable for the suction and discharge transfer of petroleum product in in-plant application.

**Standard:** EN 13765 TYPE 2 & AS 2117 TYPE 3 GRADE 1 & 2.

**Construction:** Hose made from Polypropylene fabric and films, films with PVC coated fabric cover, inner and outer wires are galvanized MS.

**Finishing:** Wrapped Surface

**Reinforcement:** High tensile Nylon Cord.

**Temperature Range:** -35°C to +90°C (-30°F to 195°F)

Part No	Nominal Bore	Hose O.D. (Nom.)	Working Pressure		Min. Bend Radius
	mm		psi	bar	
IF802-16	25	38	150	10	90
IF802-24	38	52	150	10 120	120
IF802-32	50	64	150	10	150
IF802-40	65	80	150	10	180
IF802-48	75	92	150	10	250
IF802-64	100	115	150	10	350

For more details or product related enquires feel free mail us: [info@italflexitaly.it](mailto:info@italflexitaly.it)