


Water Discharge Hose

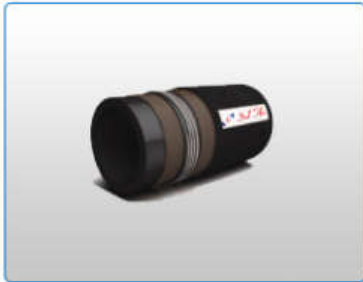

Application

Light weight rubber hose design for water, natural liquid fertilizer, waste water, etc., for submerged pump and irrigation systems.

Cover : Synthetic rubber blended

Core: Synthetic rubber blended

Plies of synthetic cords

Temperature Range:Continuous: -20°C to +85°C.

Part No	Hose I.D. (Nom.)		Hose O.D. (Nom.)	Working Pressure		Min. Burst Pressure	
	inch	mm		psi	bar	psi	bar
IF602-16	1	25	32	150	10	435	30
IF602-20	1.1/4	32	39	150	10	435	30
F602-24	1.1/2	38	45	150	10	435	30
IF602-32	2	51	58	150	10	435	30
IF602-40	2.1/2	63	63	150	10	435	30
IF602-48	3	76	83	150	10	435	30
IF602-56	3.1/2	89	97	150	10	435	30
IF602-64	4	102	109	150	10	435	30
IF602-80	5	127	137	150	10	435	30
IF602-96	6	152	162	150	10	435	30
IF602-128	8	203	217	150	10	435	30

For more details or product related enquires feel free mail us: info@italflexitaly.it