


Oil Suction & Discharge Hoses 20 Bar W.P 300 PSI

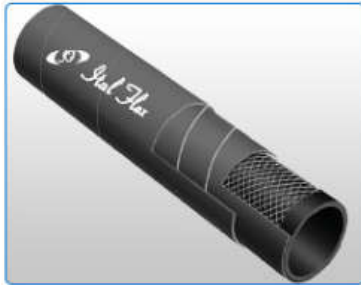

Application

20 Bar (300 PSI) light weight (50% aromatics) suction and delivery of petroleum products.

Type: Mandrel-Built Hose

Tube: Black color or NBR blend (50% aromatics) with static conducting

Finishing: Wrapped Surface

Reinforcement: Multi layers nylon cord with high tensile steel wire.

Cover : Black Oil and Weather, It is resistant to ozone crack, abrasion and weather condition.

Temperature Range: -35°C to 100°C (30°F to 212°F)

Part No	ID x OD		Max. Work Pressure	Burst Pressure	Standard Length	Weight
	Inch	MM	PSI	PSI	M	KG / M
IF614-16	1.00 x 1.42	25 x 36	300	900	30/60	1.01
IF614-20	1.25 x 1.69	32 x 44	300	900	30/60	1.22
IF614-22	1.38 x 1.81	35 x 46	300	900	30/60	1.18
IF614-24	1.50 x 1.93	38 X 49	300	900	30/60	1.41
IF614-28	1.77 x 2.24	45 x 57	300	900	30/60	1.64
IF614-32	2.00 x 2.50	51 x 63	300	900	30/40/60	1.93
IF614-40	2.50 x 3.03	63 x 77	300	900	30/40/60	2.35
IF614-48	3.00 x 3.54	76 x 90	300	900	30/40/60	3.47
IF614-64	4.00 x 4.65	102 x 118	300	900	30/60	4.95
IF614-80	5.00 x 5.71	127 x 1451	300	900	30/60	6.58
IF614-96	6.00 x 6.73	152 x 174	300	900	30/60	8.05
IF614-128	8.00 x 8.86	203 x 228	300	900	12/30	14.09
IF614-160	10.00 x 11.02	254 x 280	300	900	12	29
IF614-192	12.00 x 13.00	305 x 330	300	900	12	49

For more details or product related enquires feel free mail us: info@italflexitaly.it